


INSTALLATION INSTRUCTIONS

FUN HORN – Model 330

Your purchase of a Wolo FUN HORN is a perfect choice to compliment your vehicle. Wolo's products are manufactured with the finest materials. Each horn is tested to ensure it meets all manufacturing specifications, before it is packaged. If you need help installing this product, our technicians are available to answer your questions, Monday through Friday from 9 AM to 4 PM EST by calling 1-888-550-HORN (4676).

MOUNTING FIG. #1


1. LOCATE AN AREA IN THE ENGINE COMPARTMENT THAT IS DRY AND SAFE FROM EXHAUST MANIFOLD HEAT.
2. The Fun Horn's open red trumpet is to be mounted facing downward. This will help prevent water and dirt from entering into the horn.
3. Drill a 1/4 inch hole at the selected mounting location. Mount using bolt and nut provided.



WIRING

Electrical Connections for a New Horn Button Switch: Fig. #2

4. Connect the horns (+) terminal to 12-volts positive such as, battery, alternator or accessories. Use 16-gauge or heavier wire. **IMPORTANT:** Always make sure that there is a 15-amp fuse used in the horn circuit to protect the vehicle, (not included).
5. Connect the horns (-) terminal to the horn switch, (not included).
6. Connect the horns switch's other terminal to ground, any metal body surface that is clean of paint and rust.
7. Provided in the kit is wire leads with 1/4" push-on insulated terminals, for easy connection to the FUN HORN. Installation is complete.

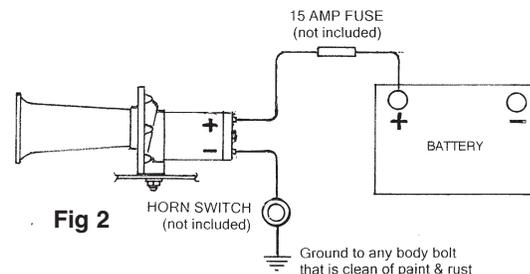


Electrical Connection to vehicles horn system TWO-(2)

TERMINAL WIRING FIG. #3

Two-(2) wire systems:

8. For vehicles where the factory horn wires connect to two-(2) terminals, simply transfer the wires to the FUN HORN'S terminals.
9. If the wire terminals that were connected to your vehicle's factory horn wires don't connect to your new Wolo FUN HORN, wire leads with 1/4" push-on insulated terminals are provided in the kit. The installation is complete and the horn is ready to be used.

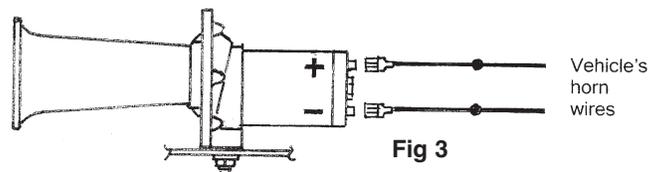


IMPORTANT: Always make sure that a 15-amp fuse is used in the horn circuit to protect the vehicle. When testing the horns, if the sound doesn't correct, reverse the wires connected to the terminals of the FUN HORN.

Electrical Connection to vehicles horn system ONE-(1)

TERMINAL WIRING FIG. #4

One (1) wire systems:

10. For vehicles where the factory horn wire connects to one-(1) terminal, simply transfer the wire to the FUN HORN'S positive (+) terminal.
11. The FUN HORN'S negative terminal is connected to ground, any metal body bolt. A ground connection should be free of rust and paint.
12. If the wire terminal that was connected to your vehicle's factory horn wire doesn't connect to your new Wolo FUN HORN, wire leads with 1/4" push-on insulated terminals is provided in the kit. The installation is complete and the horn is ready to be used.

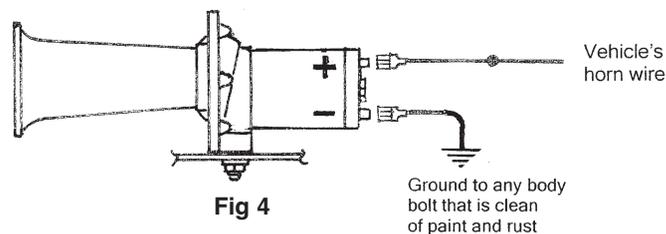

IMPORTANT: Always make sure that there is a 15-amp fuse is used in the horn circuit to protect the vehicle. When testing the horns, if the sound doesn't correct, reverse the wires connected to the terminals of the FUN HORN.

WARRANTY

Wolo Manufacturing Corporation ("Wolo") warranties to the original purchaser, for three months from the date of purchase, that this product is free from defects in workmanship and materials. If there is such a proven defect, Wolo, at its option, will either repair or replace the item free of charge, if it is returned to Wolo within three months from the date of purchase together with proof of purchase as described below. Wolo reserves the right to inspect any defect prior to settling any warranty claim by repair or replacement. This warranty is limited as above provided and Wolo will not be responsible for fire or other casualty or accident, due to neglect, abuse, abnormal use, modifications, faulty installation of this product, or natural causes.

ANY EXPRESSED WARRANTY NOT PROVIDED HEREIN IS EXCLUDED AND DISCLAIMED. THE IMPLIED WARRANTIES OF MERCHANTABILITY AND OF FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY LIMITED TO A TERM OF THREE (3) MONTHS. UNDER NO CIRCUMSTANCES SHALL WOLO BE LIABLE TO PURCHASER OR ANY OTHER PERSON FOR ANY SPECIAL OR CONSEQUENTIAL DAMAGES, WHETHER ARISING OUT OF BREACH OF WARRANTY OR OTHERWISE.

To obtain warranty service, return the product prepaid, and include the original bill of sale showing the date of purchase. Provide with the return a brief description of the problem. Also, include with the return a check or money order in the amount of \$10.00 to cover return shipping. Mail to:

Wolo Manufacturing Corp.
One Saxwood Street, Deer Park, NY 11729 Attn: Warranty Service
E-mail: tech@wolo-mfg.com