



INSTALLATION INSTRUCTIONS

Model 820-825 GIANT ROOF MOUNT AIR HORNS

Your choice of the Wolo's Giant Roof Mount Air Horn is the perfect choice to compliment your vehicle. Wolo's horns are manufactured with the finest of material. Every horn is inspected and tested before being packaged. Precision workmanship and quality components will assure years of dependable service. If you need help installing your new Wolo horn or have any questions about the product. Our technicians are available to answer your questions Monday thru Friday 9 AM to 4 PM EST at 1-888-550-HORN (4676).

Air Horn Installation

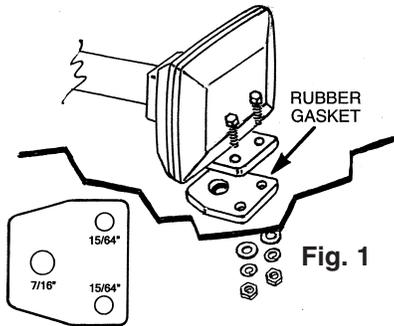


Fig. 1

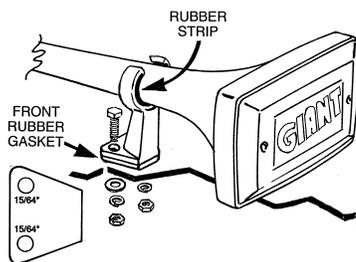


Fig. 2

1. Locate the desired area you wish to mount the Giant air horn. For best results, the front of the horn should be unobstructed so that the horn's sound can project straight ahead. Use the horn's gasket as a template, mark hole locations and drill to size. See fig. 1.
2. Secure the horn to the vehicle using the hardware provided. Tighten screws evenly to prevent damage to the horn. See fig. 2. **IMPORTANT:** Be sure to use the rubber gasket to protect against water leaks.
3. Place the rubber-molding strip into the front trumpet support bracket. Position the bracket around the narrow part of the trumpet. Push the bracket forward until it is tight. Use the bracket as a template, mark hole locations and drill to size. See fig. 3.
4. Secure the front trumpet support bracket to the vehicle using the hardware provided. Tighten screws evenly. **IMPORTANT:** Be sure to use the rubber gasket to protect against water leaks.
5. Secure the flexible inlet hose into the base of the horn. Do not remove the Teflon tape on the threaded end of the hose. The tape is used to help prevent air leaks. **CAUTION:** Avoid making any kinks or sharp bends in the flexible inlet hose that might reduce the airflow to the horn, such could alter the sound of the horn.

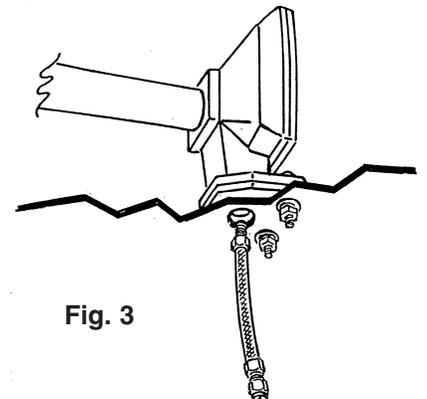


Fig. 3

6. Connect the other end of the flexible inlet hose to the valve that will provide air from the tank on-board system

WARRANTY

Wolo Manufacturing Corporation ("Wolo") warranties to the original purchaser, for three months from the date of purchase, that this product is free from defects in workmanship and materials. If there is such a proven defect, Wolo, at its option, will either repair or replace the item free of charge, if it is returned to Wolo within three months from the date of purchase together with proof of purchase as described below. Wolo reserves the right to inspect any defect prior to settling any warranty claim by repair or replacement. This warranty is limited as above provided and Wolo will not be responsible for fire or other casualty or accident, due to neglect, abuse, abnormal use, modifications, faulty installation of this product, or natural causes.

ANY EXPRESSED WARRANTY NOT PROVIDED HEREIN IS EXCLUDED AND DISCLAIMED. THE IMPLIED WARRANTIES OF MERCHANTABILITY AND OF FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY LIMITED TO A TERM OF THREE (3) MONTHS. UNDER NO CIRCUMSTANCES SHALL WOLO BE LIABLE TO PURCHASER OR ANY OTHER PERSON FOR ANY SPECIAL OR CONSEQUENTIAL DAMAGES, WHETHER ARISING OUT OF BREACH OF WARRANTY OR OTHERWISE.

To obtain warranty service, return the product prepaid, and include the original bill of sale showing the date of purchase. Provide with the return a brief description of the problem. Also, include with the return a check or money order in the amount of \$10.00 to cover return shipping. Mail to:

Wolo Manufacturing Corp.
One Saxwood Street, Deer Park, NY 11729
Attn: Warranty Service
E-mail: tech@wolo-mfg.com