

INSTALLATION INSTRUCTIONS FOR ALL MODELS OF WOLO SERIES 3700 PRIORITY 2 WARNING LIGHTS MAGNET MOUNT

Your choice of a Wolo warning light is the perfect choice to compliment your vehicle. Wolo's warning lights are manufactured with the finest materials. Each light is tested to meet our high standards before it is packaged, to assure a perfect working light. Our quality workmanship and components are Wolo's assurance of a product that will give years of dependable service.

If you need help using your new Wolo warning lights, our technicians are available to answer your questions, Monday thru Friday, from 9 AM to 4 PM EST at 1-888-550-4676.

MAGNET MOUNTING


IMPORTANT: Vehicle roof construction varies for vehicle as well as driving conditions. The vehicle should never be driven with this warning light magnetically mounted. It is possible that the light could dislodge off the mounting surface and cause injury or damage. Ignoring this warning shall be the sole responsibility of the user and or vehicle owner.

1. The magnets holding power to the mounting surface is dependent upon the following: flatness, condition and finish of surface as well as the thickness of steel surface.
For maximum magnet strength follow the recommendations:
 - A. The vehicles mounting surface should be kept clean and free of wax, dirt, dust and foreign particles.
 - B. The bottom of the magnets rubber cover should be kept clean and free of wax, dirt, dust and foreign particles.
 - C. Always make sure that the mounting surface is flat and that all four (4) magnets are fully secured to the mounting surface.
 - D. Never attempt to secure magnet mount to a vehicle that has a fabric or vinyl covering the mounting surface.
2. Locate the desired location where you wish to mount the warning light. For best results you should make sure the lens is unobstructed so that the light can be seen 360 degrees.

POWERING WARNING LIGHT:

3. To turn on the warning light, simply insert the cigarette lighter plug into the vehicles power socket.
4. To turn off the warning light, remove the cigarette lighter plug from the vehicles power socket.

IMPORTANT: The cigarette light plug has built-in fuse to protect the warning light and the vehicle. If the warning light does not turn on when the plug is inserted into the vehicle power socket, check the fuse built into the power plug by the following method: The tip of the power plug has a chrome push-in contact which is secured by a nut. Unscrew the nut, pull out the contact and fuse. If the fuse needs to be replaced use a 10 amp fuse. Follow the reverse procedure to re-assemble fuse back into power plug. (See Fig. 1)

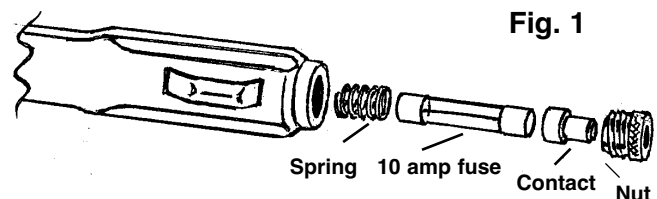

REPLACEMENT BULB

5. **WARNING: HIGH VOLT IS PRESENT IN THE LIGHT STROBE WHICH CAN CAUSE SERIOUS INJURY OR DEATH.** Before attempting to do any service, always disconnect the light from its power source and wait a minimum of ten-(10) minutes before removing the lens and any work is done. A serious injury can result if the bulb is touched when hot. Always wear gloves and eye protection when removing the bulb because the bulb is pressurized and if broken, glass can be projected.
6. Replacement with only with a Wolo 3700RB.
7. Remove the lens by removing the four screws, one screw in each corner of the lens.
8. Remove the outer lens by removing the four screws, one screw in each corner of the lens.
9. Remove the clear inner fresnel lens that has the bulb that needs to be replace by turning the lens counter clockwise.
10. The base of the bulb has two tabs, press inward and remove the bulb by lightly pushing the base side to side while lifting upward. (See Fig.2)

11. Insert the replacement bulb into PC board socket that the bad bulb was removed from and push downward on the bulb's base. Make sure the tabs of the bulb's base engage into the slots of the PC board.
12. Place the clear fresnel lens back into position and secure by turning the lens clockwise until tight.
13. The outer lens is placed back onto the light's base and secured with the four screws.
CAUTION: to prevent damage or cracking of the lens, tighten screws evenly and do not over tighten.

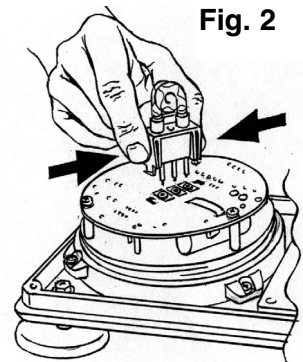


Fig. 2

CLEANING

A scratched, dull or dirty lens, reflector or mirror can cause a reduction in brightness of warning light. Never use a caustic or petroleum base cleaner on any surface of the warning light. For best cleaning results, always use household glass cleaner or mild soap with a soft lint free rag. If the lens, reflector or mirror have scratches, or are dull, it is recommended those components be replaced so to ensure maximum brightness of the warning light.

Warranty

Wolo Manufacturing Corporation ("Wolo") warrants to the original purchaser, for three months from the date of purchase, that this product is free from defects in workmanship and materials. If there is such a proven defect, Wolo, at its option, will either repair or replace the item free of charge, if it is returned to Wolo within three months from the date of purchase together with proof of purchase as described below. Wolo reserves the right to inspect any defect prior to settling any warranty claim by repair or replacement. This warranty is limited as above provided and Wolo will not be responsible for fire or other casualty or accident, due to neglect, abuse, abnormal use, modifications, faulty installation of this product, or natural causes.

ANY EXPRESSED WARRANTY NOT PROVIDED HEREIN IS EXCLUDED AND DISCLAIMED. THE IMPLIED WARRANTIES OF MERCHANTABILITY AND OF FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY LIMITED TO A TERM OF THREE (3) MONTHS. UNDER NO CIRCUMSTANCES SHALL WOLO BE LIABLE TO PURCHASER OR ANY OTHER PERSON FOR ANY SPECIAL OR CONSEQUENTIAL DAMAGES, WHETHER ARISING OUT OF BREACH OF WARRANTY OR OTHERWISE.

To obtain warranty service, return the product prepaid, and include the original bill of sale showing the date of purchase. Provide with the return a brief description of the problem with a daytime telephone number. Also, include with the return a check or money order in the amount of \$20.00 to cover return shipping. Mail to:

Wolo Manufacturing Corp.
Attn: Warranty Service
One Saxwood Street
Deer Park, NY 11729
E-mail: tech@wolo-mfg.com

© 2008 Wolo Mfg. Corp
All Rights Reserved.

Revised 12/08