

INSTALLATION INSTRUCTIONS FOR MODEL 370 BEEP BEEP HORN[™]

Your purchase of a Wolo horn is a perfect choice to complement your vehicle. Wolo's products are manufactured with the finest materials. Each horn is tested to ensure it meets all manufacturing specifications before it is packaged. If you need help installing this product, our technicians are available to answer your questions Monday through Friday from 9 AM to 4 PM EST by calling 1-888-550-HORN (4676)

MOUNTING


Locate an area in the engine compartment that is dry and safe from the engine's exhaust manifold heat. The horns front grill should be angled facing downward to prevent water from entering the horn.

WIRING (Fig A)

IMPORTANT: Use 18-gauge wire or heavier wire.

- 1. Connect a wire to one of the horns terminal posts, using either the screw post or 1/4" push-on terminal post.
- 2. Connect the other end of the wire to (+)12-volts such as the vehicle's positive (+) battery post, alternator, or fuse block.
- 3. A 10-amp fuse must be installed as shown in Fig A. (FUSE NOT INCLUDED WITH HORN). Remove the fuse from holder until installation has been completed
- 4. Connect a wire to the horn's other terminal post, using either the screw post or 1/4" push-on terminal post.
- 5. Connect the other end of the wire to the horn switch.
- 6. The horn switch's other contact is connected to (-) ground, any metal body bolt that is clean of paint and rust. (Horn switch not included.)
- 7. Install the fuse back into the holder.

Installation is complete. Press and release the vehicle's horn button switch to get a "BEEP BEEP" sound.

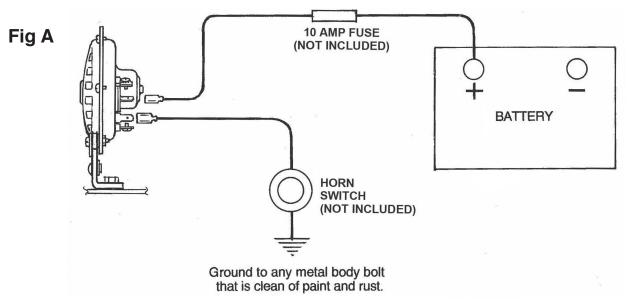

- Warranty

Wolo Manufacturing Corporation ("Wolo") warranties to the original purchaser, for three months from the date of purchase, that this product is free from defects in workmanship and materials. If there is such a proven defect, Wolo, at its option, will either repair or replace the item free of charge, if it is returned to Wolo within three months from the date of purchase together with proof of purchase as described below. Wolo reserves the right to inspect any defect prior to settling any warranty claim by repair or replacement. This warranty is limited as above provided and Wolo will not be responsible for fire or other casualty or accident, due to neglect, abuse, abnormal use, modifications, faulty installation of this product, or natural causes.

ANY EXPRESSED WARRANTY NOT PROVIDED HEREIN IS EXCLUDED AND DISCLAIMED. THE IMPLIED WARRANTIES OF MERCHANTABILITY AND OF FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY LIMITED TO A TERM OF THREE (3) MONTHS. UNDER NO CIRCUMSTANCES SHALL WOLO BE LIABLE TO PURCHASER OR ANY OTHER PERSON FOR ANY SPECIAL OR CONSEQUENTIAL DAMAGES, WHETHER ARISING OUT OF BREACH OF WARRANTY OR OTHERWISE.

To obtain warranty service, return the product prepaid, and include the original bill of sale showing the date of purchase. Provide with the return a brief description of the problem. Also, include with the return a check or money order in the amount of \$10.00 to cover return shipping. Mail to:

Wolo Manufacturing Corp. One Saxwood Street, Deer Park, NY 11729 Attn: Warranty Service E-mail: tech@wolo-mfg.com