

WOLO-LIGHTNING® POWER SUPPLY

Model 8004-PS 80-WATT / 4 OUTLET 12-24 VOLT

Model 8006-PS 120-WATT / 4 OUTLET 12-24 VOLT

6 Different Light Patterns

Your purchase of Wolo's LIGHTNING strobe power supply is the perfect choice to compliment your vehicle's emergency warning lights. Wolo's strobe power supplies are manufactured with the finest materials and are tested to meet our high standards to ensure that all functions work perfectly. Our quality workmanship and components are Wolo's assurance that this product will provide years of dependable service. If you need help using or installing your new Wolo strobe power supply, our technicians are available to answer your questions, Monday thru Friday, from 9 AM to 4 PM EST at 888-550-4676.

Before installing the strobe power supply it is important to read these instructions completely. The lives of people are dependent on the proper installation. The person installing the power supply must have advanced knowledge of the proper method of installing emergency warning lights to a vehicle as well as knowledge of the vehicle's electrical system. Again, read this manual completely and note any messages marked **"IMPORTANT"** or **"WARNING"**. A safe installation will prevent serious injury or damage to the vehicle.

Wolo's LIGHTNING, power supplies are completely wired and do not require any wiring internally. Also included in the kit is a control panel, dash mountable with an on/off switch and a push button switch, to change the strobe light pattern, all that is required for a successful installation.

Installation of the power supply requires drilling to the vehicle. The installer must carefully inspect both sides of any location that will be drilled to ensure that there are no components, wires and or any vehicle parts that could be damaged when drilling.

IMPORTANT: Always de-burr any drilled holes to ensure that there are no sharp edges. Install a rubber grommet into all metal holes that the wires are being routed through.

Always refer to the vehicle's shop manual for the deployment location of the air bags. Never install the control panel switches, wires and/or components in the deployment area of any air bag. Improper installation could reduce the effectiveness of the vehicle's air bag system and/or project an object that could cause serious personal injury or death to the driver or passenger. The user/installer assumes all responsibility to properly access a safe mounting location for the switch control panel, so to provide ultimate safety to the driver and passengers inside the vehicle.

The vehicle operator and/or maintenance department should inspect the strobe light system frequently to ensure that all bulbs are functioning and are securely held in the vehicle's light assembly.

These installation instructions should always be kept and stored in a safe location so that they can be referred to when information, maintenance or reinstallation is required. Failure to follow all safety precautions and installation procedures as outlined in these instructions could result in property damage to the vehicle, serious injury or death to you or others.

WARNING

- **At a close distance, never look directly at the bulbs when the power supply is turned on. Momentary blindness and/or permanent eye damage could occur.**
- **The strobe power supply produces HIGH VOLTAGE. Never touch or remove any of the strobe bulbs while in operation. Wait no less than 10 minutes after disconnecting the power supply from it's power source to attempt to handle bulbs or troubleshoot.**

- DO NOT connect the power supply to the vehicle's battery or any other power source until ALL bulbs are wired to power supply.

FAILURE TO FOLLOW ALL SAFETY WARNINGS AND INSTRUCTIONS COULD RESULT IN DAMAGE TO PRODUCT, VEHICLE OR COULD CAUSE SERIOUS INJURY TO YOU AND PASSENGERS!

INSTALLATION OF POWER SUPPLY Fig. A

CAUTION

The power supply is NOT waterproof and must be mounted in a dry location inside vehicle. The power supply should NEVER be exposed to weather conditions such as rain, snow, water and etc. The power supply should be mounted in a well-ventilated location. Never mount the power supply in the vehicle's engine compartment or near a heater duct.

IMPORTANT

The power supply should be mounted on a metal surface to help prevent radio interference and to act as a heat sink. Doing such will reduce heat from the power supply protecting the electronic components. Make sure that the mounting surface does not get hot from normal vehicle operation.

1. Place the power supply on the mounting surface. Using the mounting bracket as a template, mark the four hole locations onto the mounting surface and drill to size using a 1/8" drill.
2. The installer must carefully inspect both sides of the selected mounting location to ensure that there are no components, wires and or any other vehicle parts that could be damaged by the drilling.
3. Reposition the power supply to the mounting surface and secure using the sheet metal screws provided.

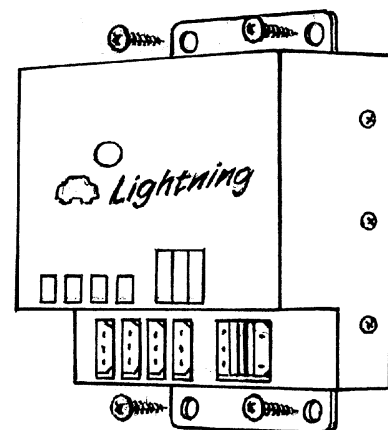


Fig. A

WIRING STROBE BULBS Fig. B

IMPORTANT: To prevent damage to the power supply, DO NOT connect any power source until all of the strobe bulbs are completely wired to the power supply.

Connect the strobe bulb cables to the power supply as listed below for either Model 8004-PS / 4 bulbs or 8006-PS / 6 bulbs. **IMPORTANT:** use only Wolo's cables model 8153 or 8155 (not included). Wolo's cables have two female plugs, one at each end. The plugs are different and will only connect to its mate, the bulb, or power supply.

MODEL 8004-PS

- Connect the vehicle's front strobe bulbs to the power supply position L1 & L2.
- Connect the vehicle's rear strobe bulbs to the power supply position L3 & L4.

MODEL 8006-PS

- Connect the vehicle's front headlight strobe bulbs to the power supply position L1 & L2.
- Connect the vehicle's front marker light strobe bulbs to the power supply position L3 & L4.
- Connect the vehicle's rear strobe bulbs to the power supply position L5 & L6.

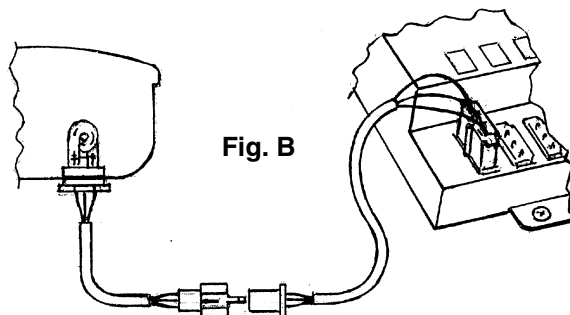


Fig. B

MOUNTING SWITCH CONTROL PANEL

Using double face tape or screws

TAPE METHOD

4. Select a mounting location for the control panel that is easy to reach. **IMPORTANT:** Be sure that the switch control panel or its wires will not interfere with air bags or the driver's vision.
5. Using the double-sided foam adhesive tape provided, mount the control panel to selected location. Make sure that mounting surface is free from dust, wax etc. A clean surface is necessary so that double-sided tape will hold properly.

IMPORTANT: THE ADHESIVE HOLDING POWER BECOMES MAXIMUM IN ABOUT 24 HOURS. LIMIT MOVING OR PUTTING PRESSURE ONTO THE KEYBOARD UNTIL THEN.

SCREW METHOD Fig. C & D

6. Remove the control panel's backing plate using a flat tip screwdriver.
7. Using the backing plate as a template, mark the two hole locations onto the mounting surface where the switch panel will be mounted and drill to size using a 3/16" drill.

IMPORTANT: The installer must carefully inspect both sides of the mounting location before drilling any holes to ensure that there are no components, wires and or any vehicle part that could be damaged by drilling.

8. Position the backing plate on the mounting surface and secure using the two sheet metal screws provided that have the countersunk head.
9. The control panel is carefully pushed onto the backing plate.

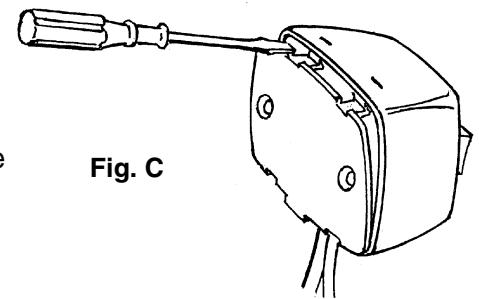


Fig. C

WIRING SWITCH CONTROL PANEL TO 12-24 VOLTS. Fig. E

WARNING: The power supply has an external 15-amp fuse to protect its internal circuit. The 15-amp in-line fuse attached to the red wire must be connected "AT A POWER SOURCE" so to protect the wire connection between the power source and power supply.

10. **BLACK WIRE:** Is connected to ground (-). Secure the BLACK to the negative battery post or under any metal body bolt. Make sure that the METAL surface around the bolt that secures the wire is clean of rust and paint so to make a good electrical connection.
11. **RED WIRE:** Is connected to 12-24 volts (+) positive. Using the inline fuse provided, connect the red wire to the vehicles fuse block or (+) positive battery post. Remove fuse from the inline fuse holder until all wiring is completed.
12. The plug with the **YELLOW** wire is connected to the power supply in the position marked "CONTROL".
13. The plug with the **RED & BLACK** wires is connected to the power supply in the position marked "12-24 VOLTS".
14. Inspect all wiring and make sure all connections are secure. Install fuse back into the inline fuse holder.


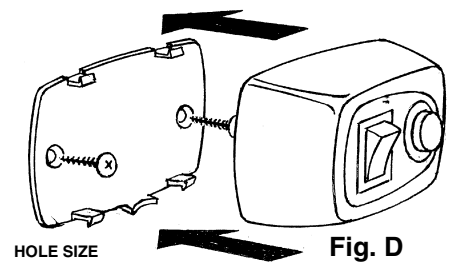


Fig. D

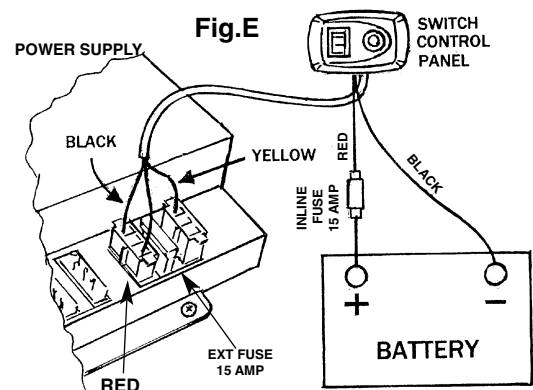

INSTALLATION IS COMPLETE

Position the on/off switch to "ON". Press and release the push button to change the light pattern.

Flash Pattern 8004-PS

1. Triple Fast Flash
2. Triple Flash
3. Rapid Rate
4. Action Flash
5. Triple Flash
6. Triple Flash

Strobe Sequence

- L1 & L4 – L2 & L3
- L1, L2, L3, L4
- L1 & L3 – L2 & L4
- L1 & L4 – L2 & L3 – L1 – L2 – L3 – L4
- L1 & L4
- L2 & L3

DESCRIPTION OF LIGHT PATTERN 8004-PS

- Pattern 1.** Lights L1 & L4 - L2 & L3 function together
Pattern 2. All lights function together
Pattern 3. Lights L1 & L3 - L2 & L4 function together
Pattern 4. Lights L1 & L4 - L2 & L3 function together then all lights function together
Pattern 5. Lights L1 & L4 function together
Pattern 6. Lights L2 & L3 function together

SPECIFICATIONS 8004-PS

- Input Voltage: 12-24 VDC
- Current: 4.15 amps @ 12.5 VDC
- Output Power: 80 Watts
- Flash Patterns: 6
- Output circuit protection

Flash Pattern 8006-PS

1. Triple Fast Flash
2. Double Flash
3. Single Fast Flash
4. Single Fast Flash
5. Double Flash
6. Double Flash

Strobe Sequence

- L6 & L5 – L4 & L3 – L2 & L1
- L1, L3 & L5 – L2, L4 & L6
- L6 – L5 – L3 – L1 – L4 – L6
- L1 – L3 – L5 – L6 – L4 – L2
- L3 & L4 – L5 & L6
- L5 & L6

DESCRIPTION OF LIGHT PATTERN 8006-PS

- Pattern 1.** Lights L6 & L5 - L4 & L3 - L2 & L1 function together
Pattern 2. Lights L1, L3 & L5 - L2, L4 & L6 function together
Pattern 3. Lights L6 – L5 - L3 – L1 – L2 – L4 function individually
Pattern 4. Lights L6 – L5 - L3 – L1 – L2 – L4 function individually
Pattern 5. Lights L3 & L4 - L5 & L6 function together
Pattern 6. Lights L5 & L6 function together

SPECIFICATIONS 8006-PS

- Input Voltage: 12-24 VDC
- Current: 5.8 amps @ 12.5 VDC
- Output Power: 120 Watts
- Flash Patterns: 6
- Output circuit protection

Warranty

Wolo Manufacturing Corporation ("Wolo") warranties to the original purchaser, for three months from the date of purchase, that this product is free from defects in workmanship and materials. If there is such a proven defect, Wolo, at its option, will either repair or replace the item free of charge, if it is returned to Wolo within three months from the date of purchase together with proof of purchase as described below. Wolo reserves the right to inspect any defect prior to settling any warranty claim by repair or replacement. This warranty is limited as above provided and Wolo will not be responsible for fire or other casualty or accident, due to neglect, abuse, abnormal use, modifications, faulty installation of this product, or natural causes.

ANY EXPRESSED WARRANTY NOT PROVIDED HEREIN IS EXCLUDED AND DISCLAIMED. THE IMPLIED WARRANTIES OF MERCHANTABILITY AND OF FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY LIMITED TO A TERM OF THREE (3) MONTHS FROM DATE OF PURCHASE. UNDER NO CIRCUMSTANCES SHALL WOLO BE LIABLE TO PURCHASER OR ANY OTHER PERSON FOR ANY SPECIAL OR CONSEQUENTIAL DAMAGES, WHETHER ARISING OUT OF BREACH OF WARRANTY OR OTHERWISE.

To obtain warranty service, return the product prepaid, and include the original bill of sale showing the date of purchase. Provide with the return a brief description of the problem. Also, include with the return a check or money order in the amount of \$10.00 to cover return shipping. Mail to:

Wolo Manufacturing Corp. One Saxwood Street, Deer Park, NY 11729
Attn: Warranty Service E-mail: tech@wolo-mfg.com